CS 77-FP

The CS 77-FP EI30 and EI60 was developed based on the existing CS 77 profiles and accessories for windows and doors and was tested in an optimized European test and approval program. The fireproofing time span is achieved by inserting a special cooling material into the profile chambers and by using self-adhesive and water-resistant swelling gaskets. These gaskets do not need to be sealed, reducing fabrication time of the profiles and saving costs.

The CS 77 fireproof range is available as outward opening single and double doors, panic doors, combined fixed window elements as well as glazed partition walls. This extensive range of configurations offers one of the largest ranges of options and combinations for architects to work with. Furthermore a large choice of accessories and locking devices is available.

CS 77-FP GLAZED PARTITION WALLS / FIXED WINDOW ELEMENTS

EI30



EI60



Approved configurations



CS 77-FP DOORS
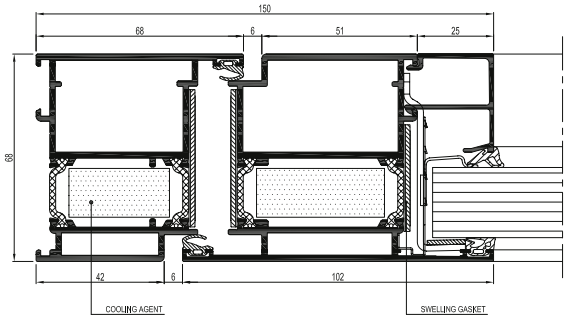
EI30